



Snap lock screw

Ilveskaari 12, FI-01900 Nurmijärvi




+358 400 154 888



www.kingi.fi

KINGI® Snap lock screw with Teflon sliding washer



Noiseless roof

The 0.5 mm thick **Teflon sliding washer** reduces the noise caused by the distortion of sheets (thermal expansion). Its coefficient of friction is the third smallest of all known materials.



Improved grip

The Kingi Snap lock screw has a larger wood thread and **asymmetrical thread**, both of which enhance the screw's grip.



The best installability

Because of the **deeper Torx head** Kingi Snap lock screw is more stable to install. Additionally, it reduces wear of the screw head and installation bit.

Technical specifications

Size: 4,5 x 25 mm

Head: Torx T20

Package: 1000 screws / box (incl. 1 x T20 bit)

Material: Carbon steel C1022



Coating: 12 µm zinc plating (EN 1995-1-1)

Material of sliding washer: PTFE (Teflon)

The corrosion resistance complies with Service Class 2 according to standard EN 1995-1-1 (fasteners for timber in upper roof structures). The Snap lock screw has the same Service Class and corrosion environment as, for example, nail plate in roof trusses.



The screws are manufactured according to the certified quality system ISO 9001:2015.

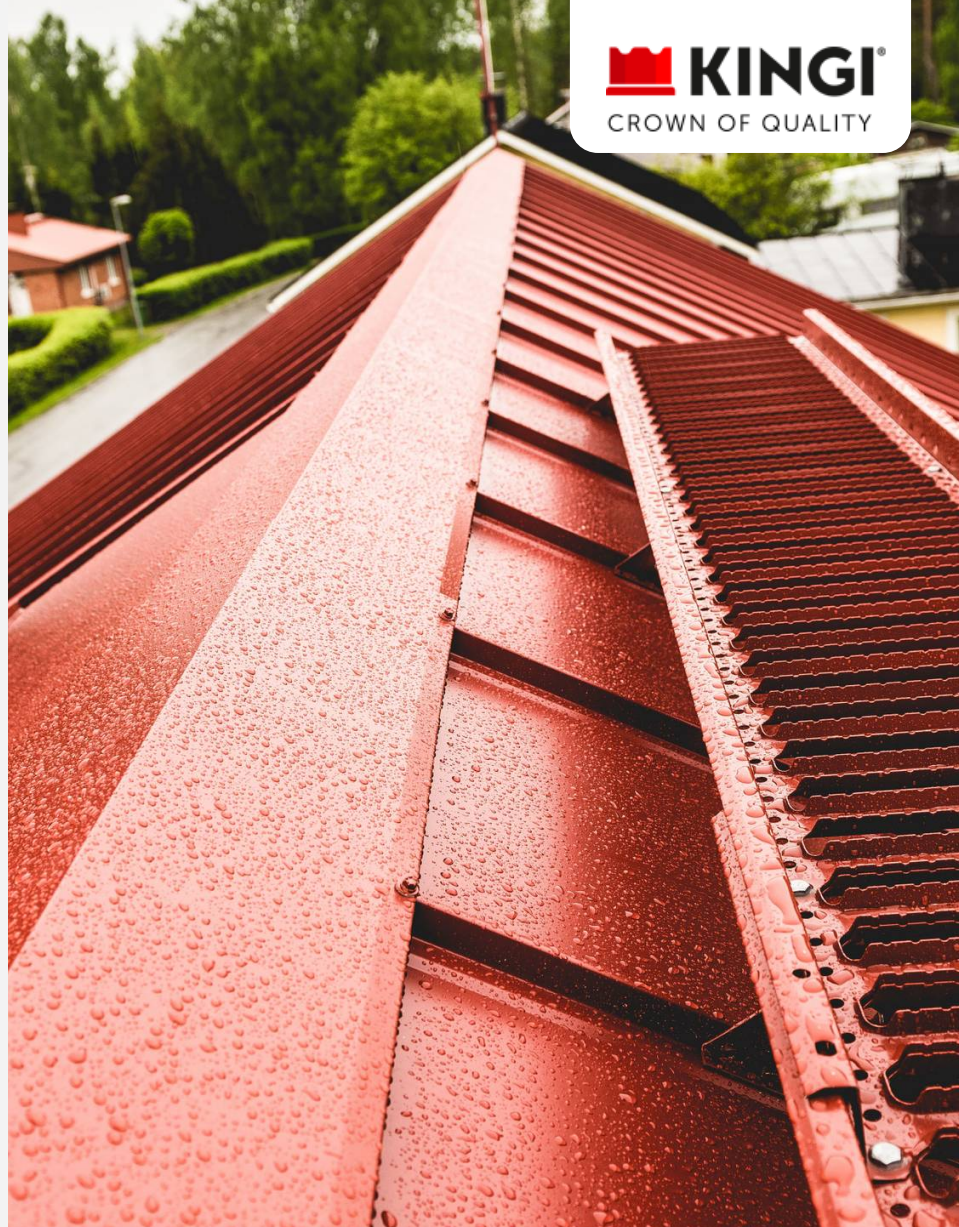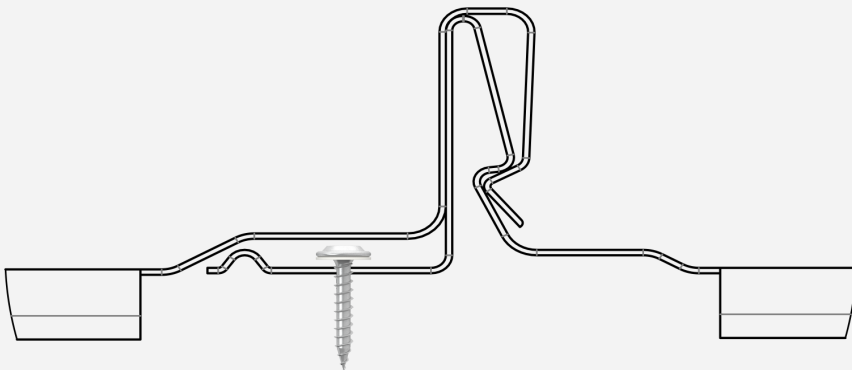

KINGI
CROWN OF QUALITY